

# HONDA


## INSTALLATION INSTRUCTIONS

Accessory  
**ALUMINUM SKID PLATES**  
P/N: 08P71-HL3-601

Application  
**SXS700M2/M2D/M4/M4D**

Publication No.  
**MII 15753**  
Issue Date  
**August 2016**

### PARTS LIST

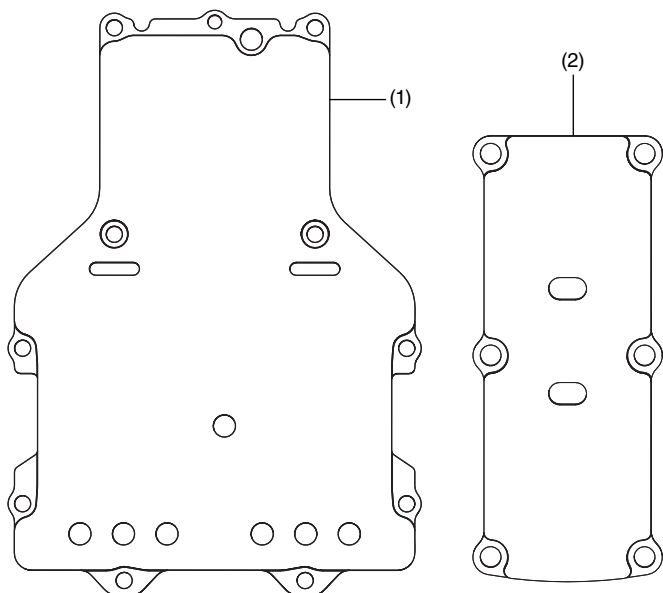

| No. | Description                              | Qty |
|-----|------------------------------------------|-----|
| (1) | Front skid plate                         | 1   |
| (2) | Rear skid plate                          | 1   |
| (3) | Installation Instruction URL (not shown) | 1   |

### TOOLS AND SUPPLIES REQUIRED

10 mm socket  
Ratchet  
Torque wrench

### TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.


| Item      | N·m | kgf·m | lbf·ft |
|-----------|-----|-------|--------|
| 6 mm bolt | 10  | 1     | 7      |

### USE AND CARE INFORMATION


- Check the accessory mounts frequently and retighten if necessary.
- Replace this accessory with a new one if it is damaged.
- Inspect the skid plates and related hardware. Replace all parts that appear rusted, cracked, deformed or worn out prior to use.
- To clean the skid plate assembly, rinse it thoroughly with cool water to remove loose dirt, and then wash with warm, soapy water and a clean cloth or sponge. Do not use a brush to clean this accessory as it may scratch the surface.
- Never use petroleum based solvents such as gasoline, thinner or benzene to clean this accessory. Also do not use acid or alkaline cleaners.
- Inspect all nuts and bolts on the skid plate prior to each use. Tighten all nuts and bolts that are loose. Missing, stripped, fractured, or bent bolt and nuts need to be replaced immediately.

### INSTALLATION

1. Referring to the Service Manual for the vehicle, remove the front and rear skid plates. Save the hardware for installation of the accessory skid plates.

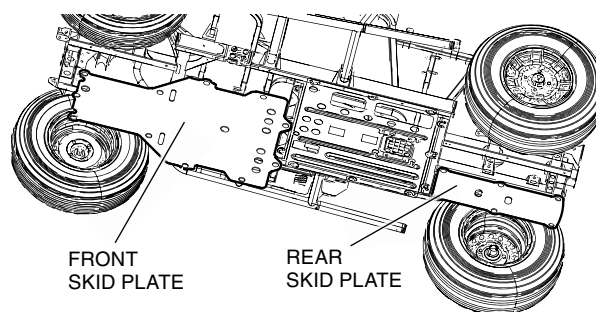

2. Install the accessory front skid plate using the hardware saved from Step 1 as shown. Tighten the bolts to the specification in the torque chart.

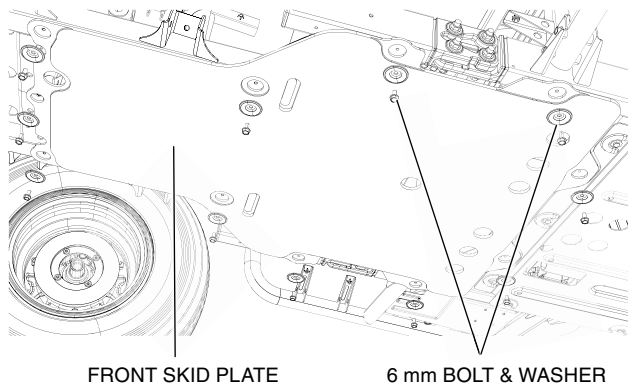

3. Install the accessory rear skid plate using the hardware saved from Step 1 as shown. Tighten the bolts to the specification in the torque chart.

