



INSTALLATION INSTRUCTIONS


Accessory
**CARGO BOX MOUNT
PLATE**
P/N 0SL41-HL5-A00

Application
SXS520M2

Publication No.
MII 17623
Issue Date
December 2021

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

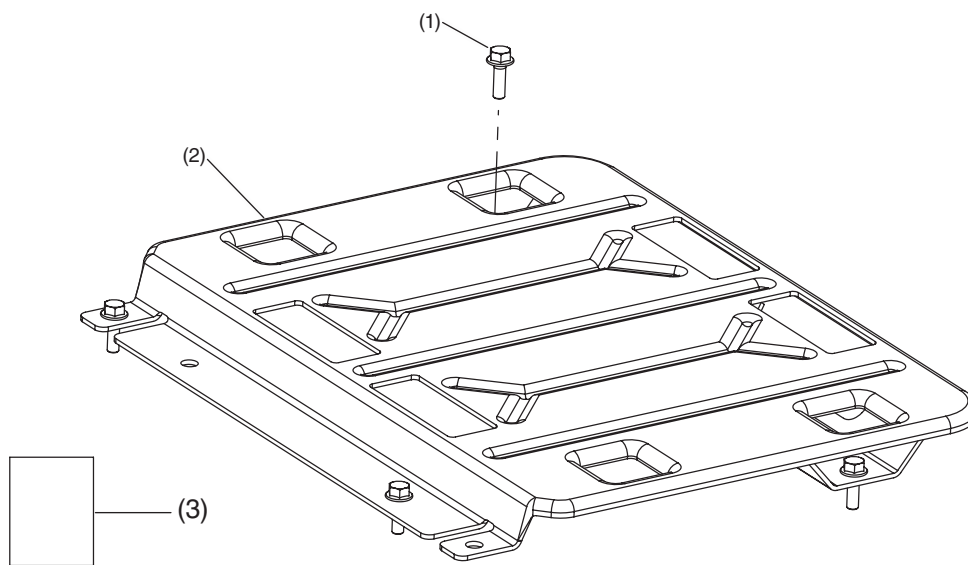

No.	Description	Qty
(1)	10 × 20 mm hexagonal flange bolt	4
(2)	Mount plate	1
(3)	Installation Instructions URL	1

TOOLS REQUIRED

Socket (10 mm)
Allen key (5 mm)
Ratchet
Torque wrench

TORQUE CHART


Item	N.m	kgf.m	lbf.ft
10 × 20 mm hexagonal flange bolt	9.9	1.0	7.3

NOTE:


- **Never exceed the cargo box limit of 50lb (22kg) and the maximum of 25lb (11kg) per item.**
- **Always make sure the hooks and the Honda Pro-Connect® latches are properly engaged before riding.**
- **Make sure all cargo is secured before riding.**
- **Please read and follow all instructions and warnings supplied with the cargo box or cargo box attachment bracket.**
- **Mount Plate is required for installation of the Half Cargo Box.**

INSTALLATION


1. Select the location (driver or passenger side) for the installation of the cargo box attachment bracket

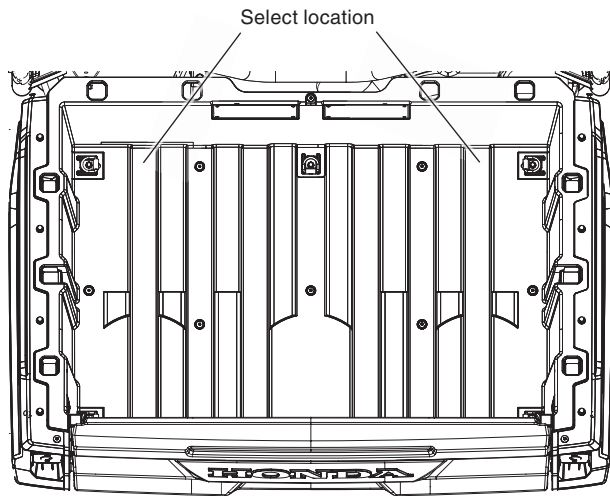

2. Remove the original hardware from the bed. (Driver side installation shown)

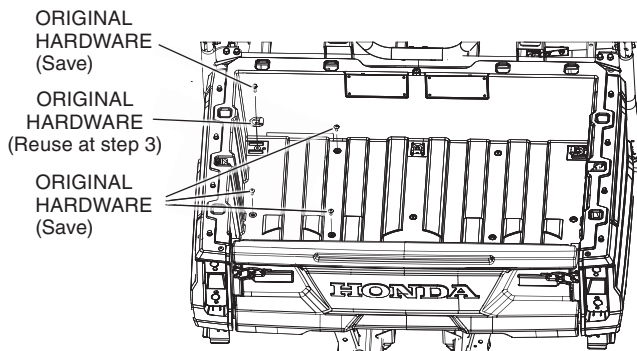

3. Install the mount plate on the bed by installing the 4 flange bolts (see TORQUE CHART for torque values).

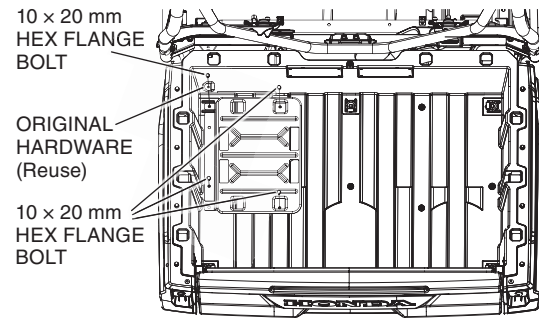

4. To install the cargo box, align the hooks on the rectangular holes, push the hook in the rectangular holes then push them to the front. When the hooks are in place, lock the two Honda Pro-Connect latches by pressing down the two Honda Pro-Connect levers (see cargo box instructions for the hooks and the Honda Pro-Connect latch installations).

