



INSTALLATION INSTRUCTIONS

Accessory

REAR LUGGAGE BAG, Lg.
P/N 0SL56-HL5-100A

Application

SXS500M2

Publication No.


MII 14948

Issue Date

June 2014

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

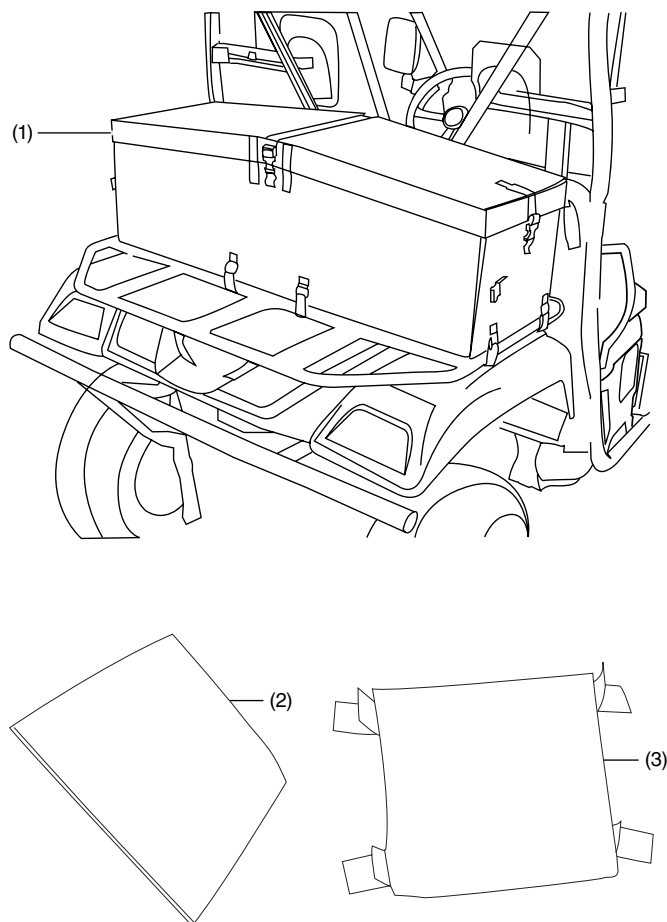

No.	Description	Qty
(1)	Rear luggage bag, large	1
(2)	Foam side panel	2
(3)	Compartment divider	2


USE AND CARE INFORMATION

- This luggage bag is designed to transport lightweight items such as camping gear. Tools, equipment, and other heavy cargo must be secured directly to the cargo rack.
- To clean, sponge with mild soap and cold water, rinse and allow to drip dry.
- Do not use bleach, harsh detergents, or hot water.
- Do not machine wash or dry. For stubborn stains mild detergent is recommended.
- Store this accessory indoors when not in use.

INSTALLATION


Cargo Bag Assembly

1. Open the bag and remove the lid, compartment dividers, and foam side panels.
2. Install the two compartment dividers to help stabilize the bag for Step 3.

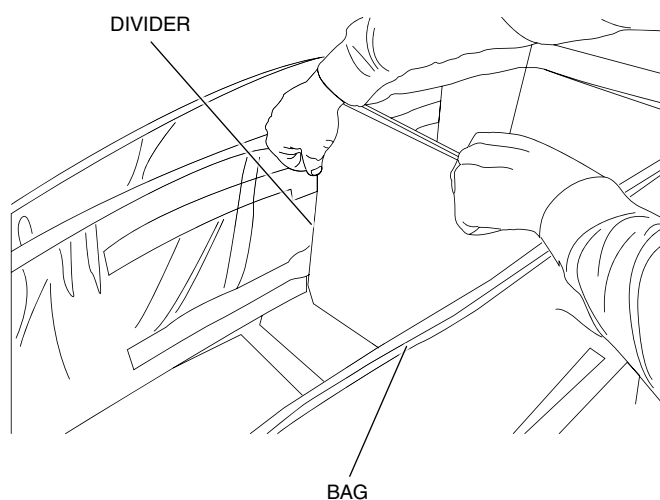


- Open the pocket located inside the end of the bag and insert the foam side panel (long side vertically) ensuring that it's pushed all the way to the bottom of the pocket.


Close the pocket opening and repeat on the opposite side.

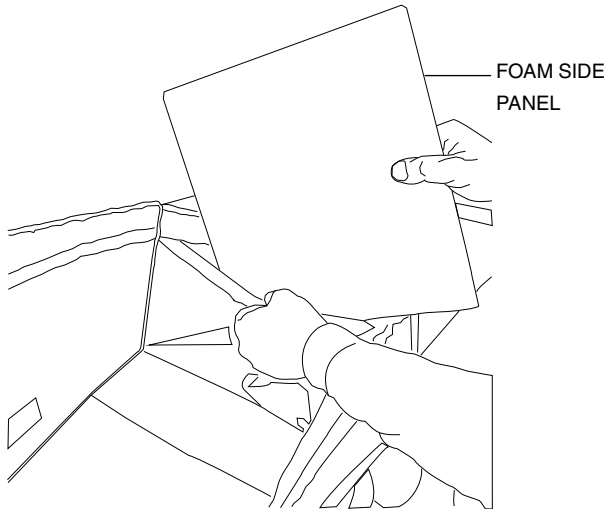

- Install the lid on the main body of the bag ensuring that all sides are under the flap of the lid, then connect the male and female buckles in the center of the lid on both the front and back sides.

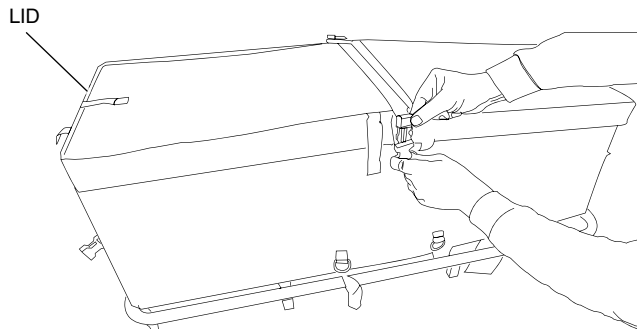


- Install the bag on top of the vehicle rear rack, making sure that the base of the bag sits on the second bar away from the cab, and not against the cab, to allow the lids to open without interference.

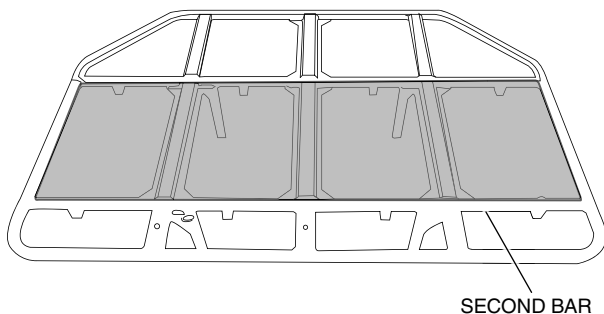

- Make sure that the front and back base panels of the bag are supported by the bars of the rear rack.


- Pass the strap around the bar on the rack, back through the "D" ring located on the bag, and then connect the hook and loop sections of the strap. Pull snug but do not over tighten.

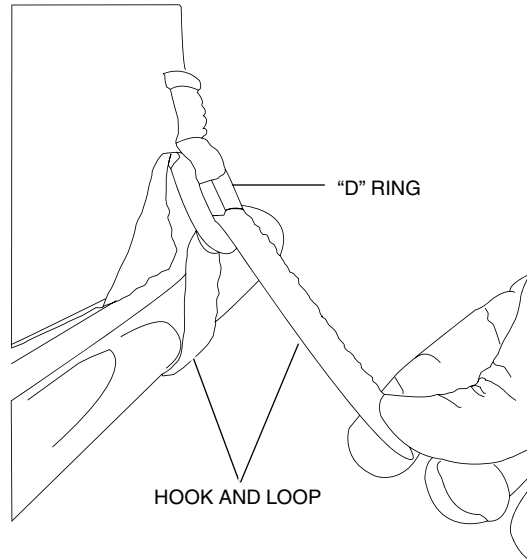

- Repeat Step 8 for all eight attachment straps.
- Make sure the bag is stable and clear of the vehicle's moving parts.

Connecting the accessory small bag to the large bag. (OSL56-HL5-100B)

- With the large bag properly installed, follow the Installation Instructions for the small bag and securely mount it to the rack before it connecting to larger bag.
- Connect the female buckles located on the large bag to the male buckles on the small bag, fixing them together.

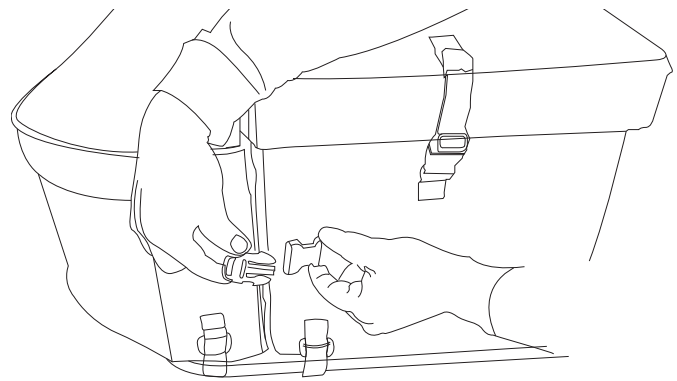

- Make sure both bags are stable and clear of the vehicle's moving parts.