



INSTALLATION INSTRUCTIONS

Accessory

FRONT SEAT COVERS
P/N 0SP32-HL3-A20C (Camo)

Application

SXS700M2/M4

Publication No.

MII 14607

Issue Date

May 2022

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST


No.	Description	Qty
(1)	Seat bottom cover (not shown)	1
(2)	Seat back cover (not shown)	1
(3)	Headrest cover (not shown)	2

USE AND CARE INFORMATION


- Completely read and understand the instructions before use.
- To clean, sponge with mild soap and cold water, rinse and allow to drip dry.
- Do not use bleach, harsh detergents, or hot water.
- Do not machine wash or dry.
- Use mild detergent for stubborn stains.

INSTALLATION


1. Remove the seat bottom.

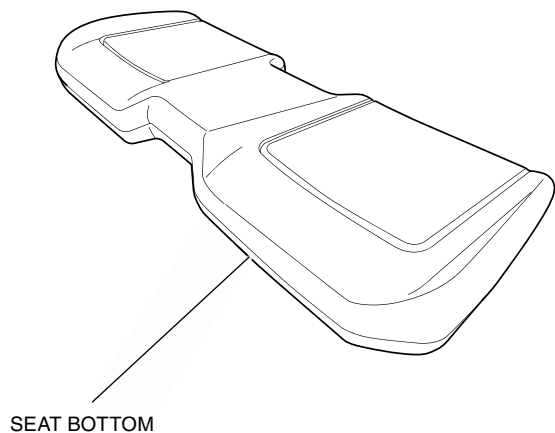


2. Place the cover over one side of the seat bottom.

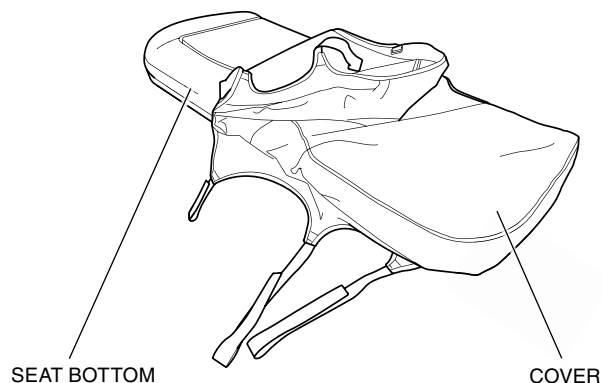


3. Place the cover over the opposite side of the seat bottom.

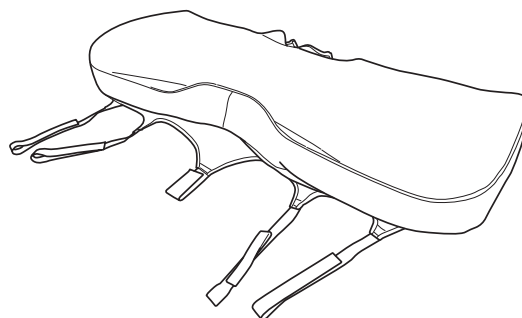


4. Thread the hook and loop fastener straps through the plastic retainers forming an "X" and connect.

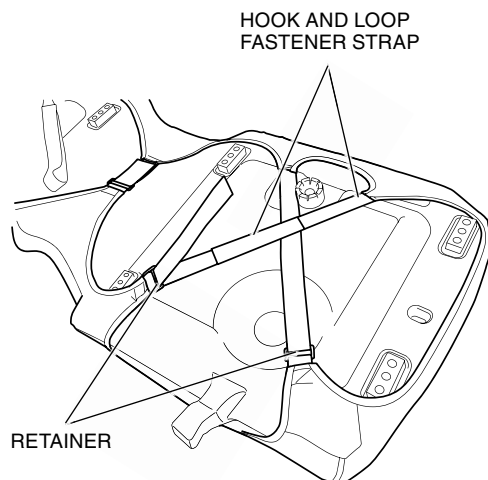


5. Thread the middle hook and loop fastener strap through the center retainer and connect.

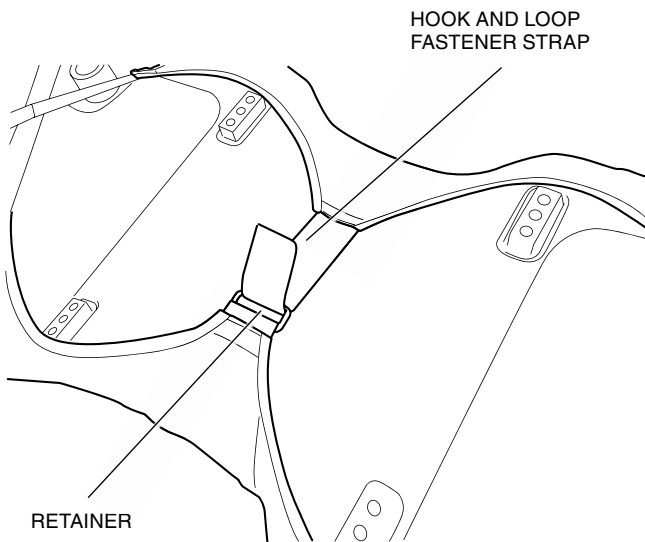


7. Reinstall seat. Do not allow the cover to interfere with the seat attachment.

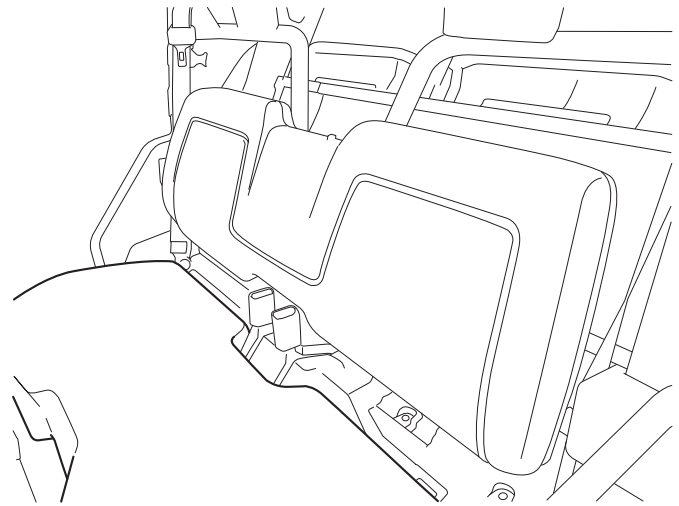


6. Evenly tension the hook and loop fastener straps.

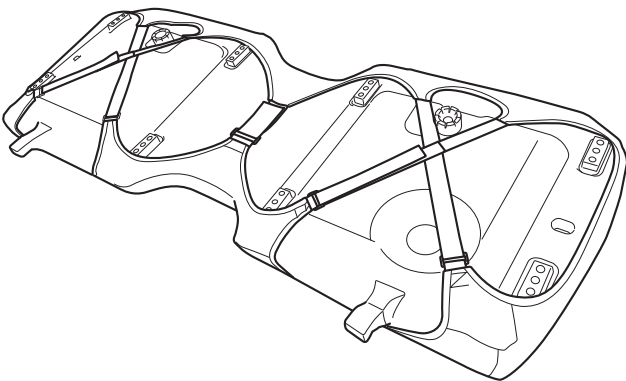


8. Place seat back cover over one side of the seat back.

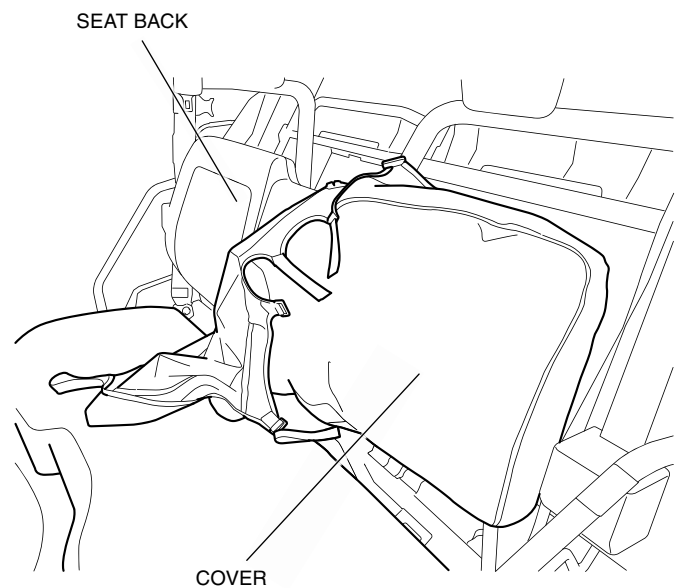


9. Place seat back cover over the opposite side of the seat.

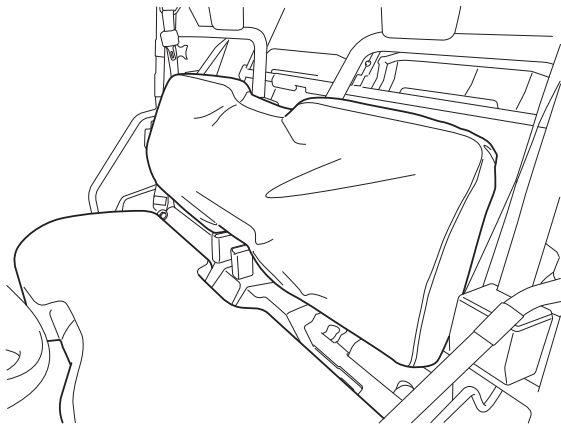


10. Thread the hook and loop fastener in front of the horizontal backrest bar.

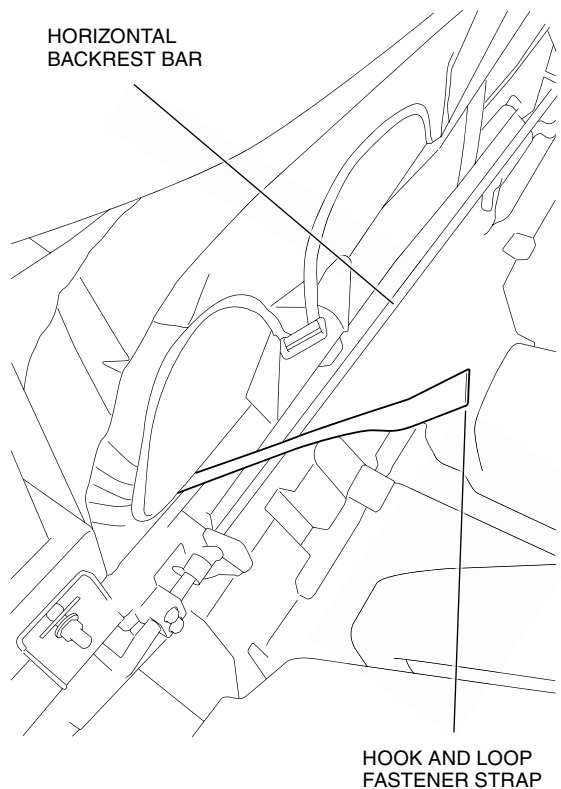

11. Thread the end of the hook and loop fastener strap through the retainer and connect.

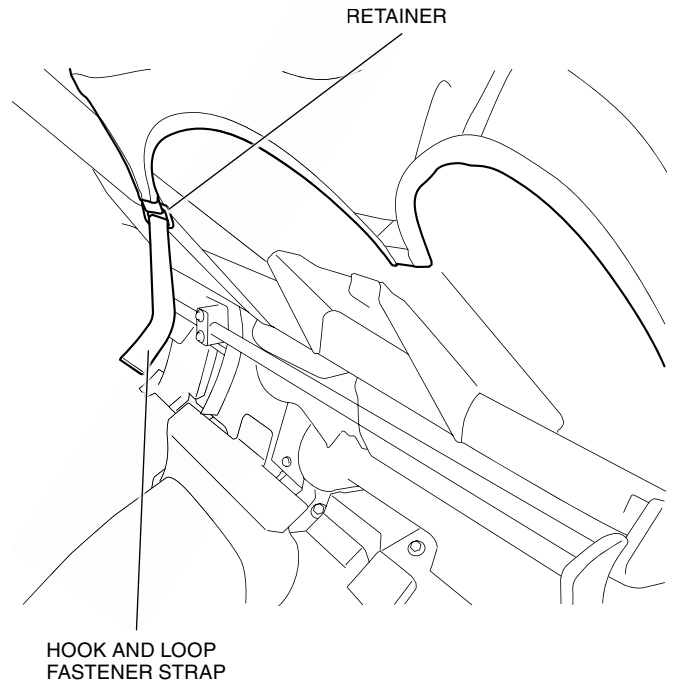

12. Place the headrest covers over the headrests.

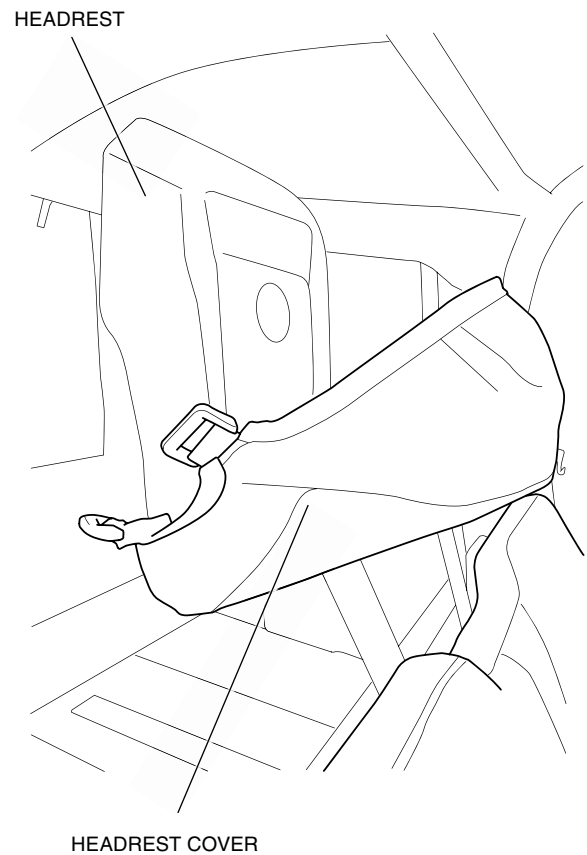

13. Thread the hook and loop fastener straps through the plastic retainers and connect.

