



INSTALLATION INSTRUCTIONS

Accessory

OUTDOOR COVER
P/N 0SP35-HL3-100

Application

SXS700M2

Publication No.


MII 14607

Issue Date

August 2013

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

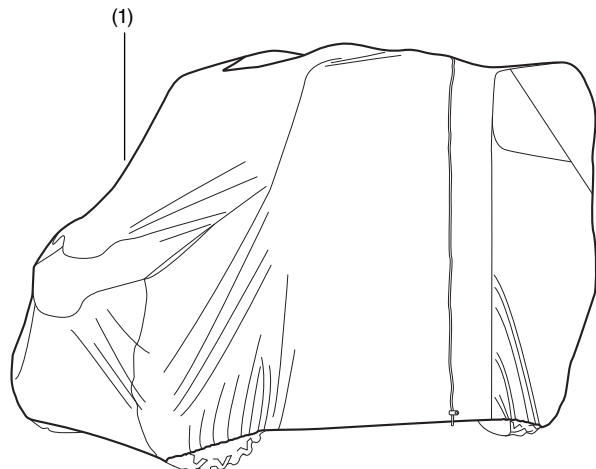

No.	Description	Qty
(1)	Outdoor cover	1

USE AND CARE INFORMATION

- Clean this accessory with warm soapy water and a sponge or soft brush. Let it air-dry.
- Do not use a washing machine or dryer.

NOTICE

- Towing the vehicle with this accessory installed can damage painted surfaces and body panels. Remove the outdoor cover before trailering the vehicle

INSTALLATION

NOTE:

- Allow the vehicle to fully cool before installing this accessory.
- Remove any accessories with sharp edges that could cut the cover before installing it.
- It may be easier to install the cover with the driver side zipper open.

1. Orient the cover with the Honda logo facing forward over the front of the cab frame.
2. Place the cover over the top of the vehicle, covering the back and front of the cab frame.
3. Pull the front of the cover over the hood and headlights.
4. Pull the rear of cover down to the ground.
5. Pull the front of the cover to the ground.
6. If open, close the driver side zipper.