



INSTALLATION INSTRUCTIONS

Accessory

WIND DEFLECTOR
P/N 0SR73-HL5-101B

Application

SXS500M2

Publication No.


MII 14948

Issue Date

June 2014

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

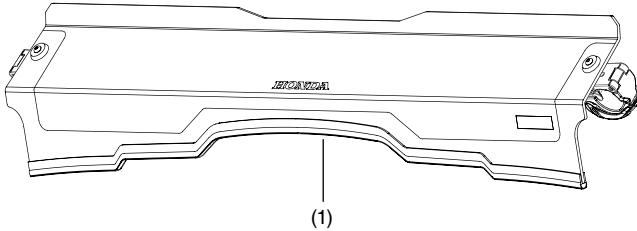

No.	Description	Qty
(1)	Wind deflector	1

USE AND CARE INFORMATION


- Check the accessory mounts frequently and retighten if necessary.
- Replace this accessory with a new one if it is damaged or discolored excessively.
- When this accessory becomes dirty, rinse it thoroughly with cool water to remove loose dirt, and then wash with warm soapy water and a clean cloth or sponge.
- Do not use a brush to clean this accessory as it may scratch the surface.
- Never use petroleum solvents such as gasoline, thinner, and benzene, to clean this accessory. Also do not use acid or alkaline cleaners.

VEHICLE MAINTENANCE (HOOD)

- To access the hood, loosen the cam locks and slide the deflector up the A-pillars.
- Tighten the cam locks to secure the deflector while accessing the hood.


NOTE

- Remove and discard the rubber shipping spacer from the cam locks before installation of this accessory.

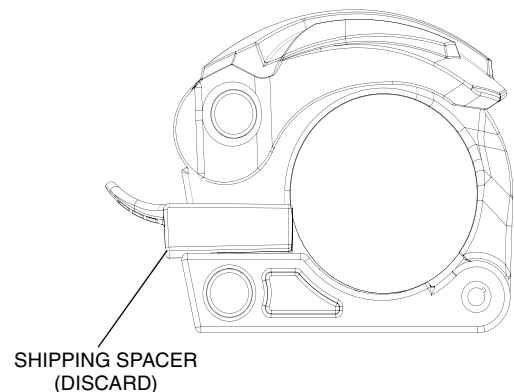


INSTALLATION

1. Open both cam locks along the sides of the wind deflector.
2. Place the wind deflector onto the vehicle and seat the bottom of the deflector onto the front hood as shown.

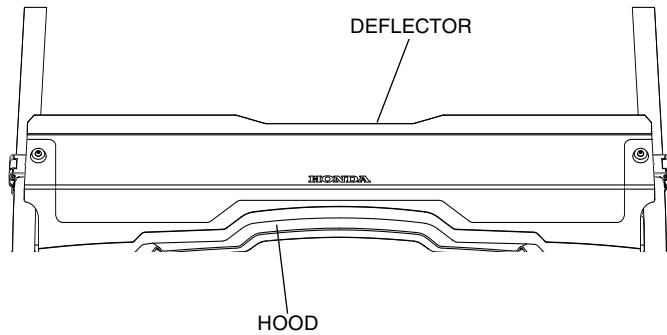

3. Align the cam lock around the cab A-pillar and snap the arm closed. Do this on both sides.

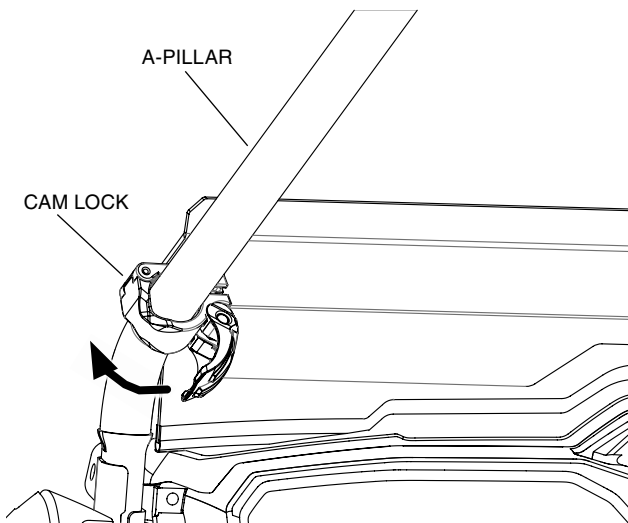

4. Adjust cam lock tension by rotating the threaded arm clockwise to tighten, counter-clockwise to loosen.

