



INSTALLATION INSTRUCTIONS

Accessory

**LED LIGHT BAR
WIRE HARNESS**
P/N 0SV31-HL4-301

Application

SXS1000M3/M3P/M5D/M5D

Publication No.


MII 15262

Issue Date

September 2015


Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

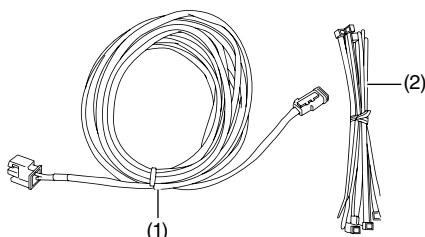


No.	Description	Qty
(1)	Wire harness (SXS1000 only)	1
(2)	Cable tie	10

LED LIGHT BAR Sold separately

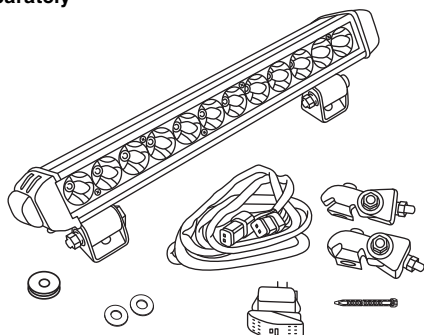

For installation, refer to the Installation Instructions.

SWITCH PLATE/VOLT METER/WIRE HARNESS Sold separately

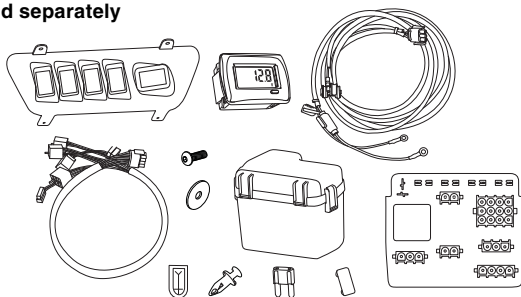

For installation, refer to the Installation Instructions.

USE AND CARE INFORMATION

- Check the accessory connections frequently and retighten if necessary.
- Replace this accessory with a new one if it is damaged or discolored excessively.
- Never use petroleum solvents such as gasoline, thinner and benzine to clean this accessory. Also do not use acid or alkaline cleaners.


INSTALLATION

NOTE:

- When installing the LED Light Bar to any SXS1000 model, use this wire harness in place of the one included with the Light Bar.
- Refer to the LED Light Bar Installation Instructions for light bar installation.

1. Install the wire harness to the right-hand end of the light bar.


Hardtop installations: Feed the wire harness through the 3/4 inch hole drilled in Step 5 of the Light Bar Installation Instructions. Install the grommet supplied with the light bar over the wire lead and into the hole.

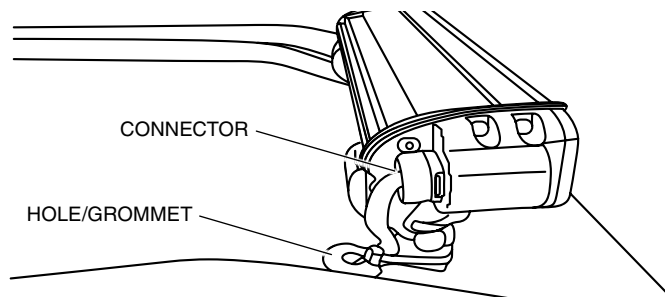

2. Route the wire harness along the upper cab frame cross tube and then down the right front A-pillar. Continue routing the wire harness behind the instrument panel and into the Accessory fuse box.

3. Route the light bar wire harness into the accessory fuse box and connect it to the LIGHT BAR connector of the fuse panel.

<Back of Fuse Box>



4. Upon completion of all wire harness routing, secure the harness with the included cable ties.
5. See page 3 of LED LIGHT BAR instructions for detailed information.