



INSTALLATION INSTRUCTIONS


Accessory
LED LIGHTS ATTACHMENT KIT
P/N 0SV31-HL5-201E

Application
SXS500M2

Publication No.
MII 14948
Issue Date
REVISED May 2017

Honda Dealer: Please give a copy of these instructions to your customer.


PARTS LIST

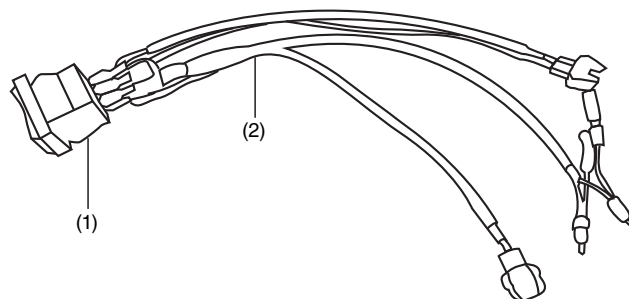

No.	Description	Qty
(1)	Switch	1
(2)	LED Lights Switch harness	1

ACCESSORY SUB HARNESS

Sold separately (P/N 08Z08-HL5-A00)

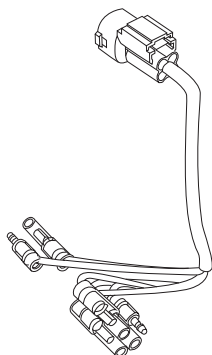

No.	Description	Qty
(1)	Accessory sub harness	1

TOOLS AND SUPPLIES REQUIRED


Utility knife
Power Drill
Hole saw, 16 mm (5/8 in)
Rotary tool and carbide burr

USE AND CARE INFORMATION

- Check the accessory connections frequently and retighten if necessary.
- Replace this accessory with a new one if it is damaged or discolored excessively.


INSTALLATION

1. Remove the hood by turning the knobs and pulling upward as shown.

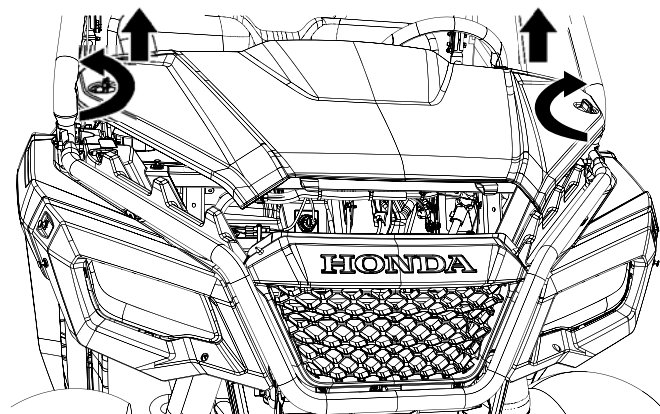

2. Using the molded template on the back side of the instrument panel (IP), make a starter hole with the drill and hole saw and then finish the cut-out for the light switch using a rotary tool and carbide burr.

< '15 and '16 >

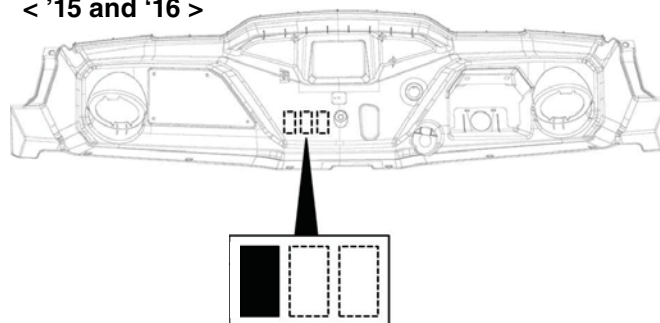


View from back side of IP; cut out the space for the light switch indicated in black.

2. Continued:


< After '16 >

View from back side of IP; cut out the lower space for the light switch as indicated.

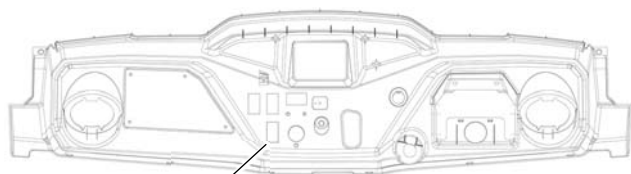

LOWER SPACE
Cut out.

3. Install the switch/LED lights switch harness into the cutout in the instrument panel.

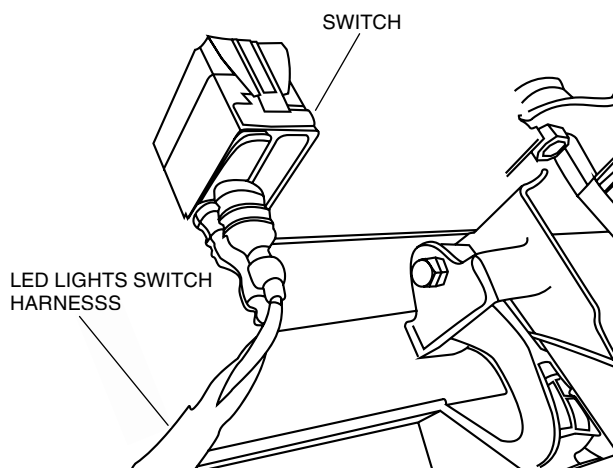


4. Install the Accessory Sub Harness by connecting it to the DLC (4P Red) connector as shown.

Connect the red and green wires of the LED lights switch harness to the corresponding color wire connectors of the Accessory Sub-harness.

Secure the harness connections with the wire ties as shown.

<VIEW UNDER FRONT HOOD>

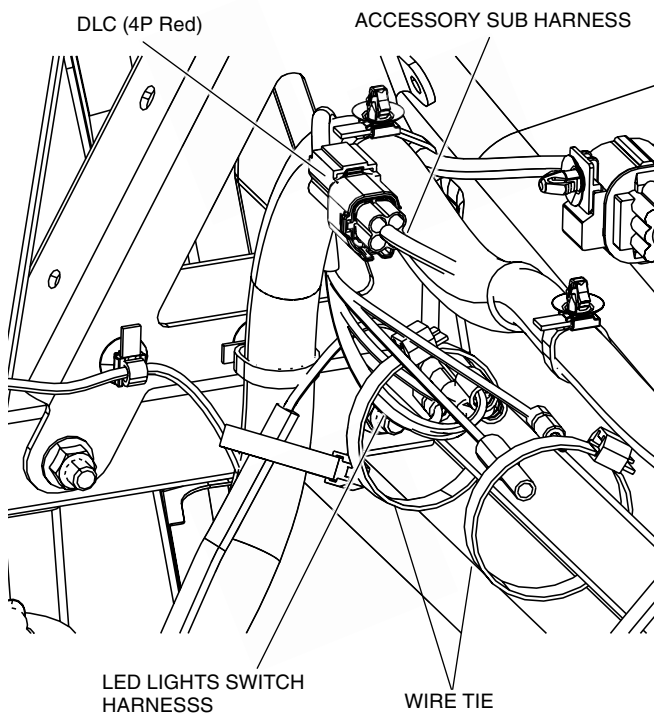

5. Connect the 2P white connector of the LED lights switch harness to the LED Light Harness as shown.

