


HONDA **INSTALLATION** **INSTRUCTIONS**

Accessory
FRONT FENDER FLARE
 P/N 08P70-HL3-600

Application
SXS700M2/M2D/M4/M4D

Publication No.
MII 15753
 Issue Date
August 2016

PARTS LIST

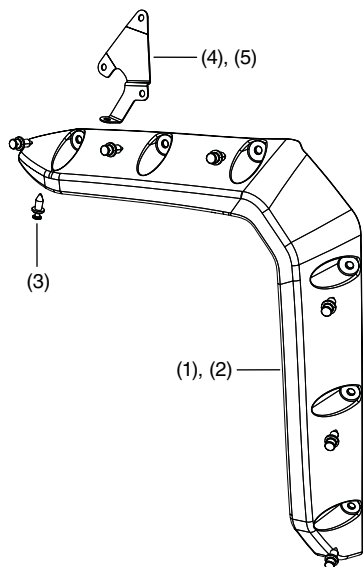

No.	Description	Qty
(1)	Front right fender flare	1
(2)	Front left fender flare	1
(3)	Trim clip	14
(4)	Right fender bracket	1
(5)	Left fender bracket	1
(6)	Installation Instruction URL (not shown)	1

TOOLS AND SUPPLIES REQUIRED

Marker

Power drill


Drill bit (8 mm)

USE AND CARE INFORMATION

- Replace this accessory with a new one if it is damaged or discolored excessively.
- To clean the fender flare, rinse it thoroughly with cool water to remove loose dirt, and then wash with warm, soapy water and a clean cloth or sponge. Do not use a brush to clean this accessory as it may scratch the surface.
- Never use petroleum based solvents such as gasoline, thinner or benzene to clean this accessory. Also do not use acid or alkaline cleaners.



INSTALLATION

1. Clean the surfaces of both front fenders and the front cover of the vehicle with water where the fender flares will be installed. The mating surfaces must be clean, dry, and free of debris or contamination.
2. Hold the left side (driver side) fender flare against the left front fender and left side front cover until it is fully seated.
3. Check to be sure there are no gaps between fender flare and body.
4. Use the left fender flare as a template to mark the drilling locations with a marker. Be careful not to move the fender flare until all six holes are marked.

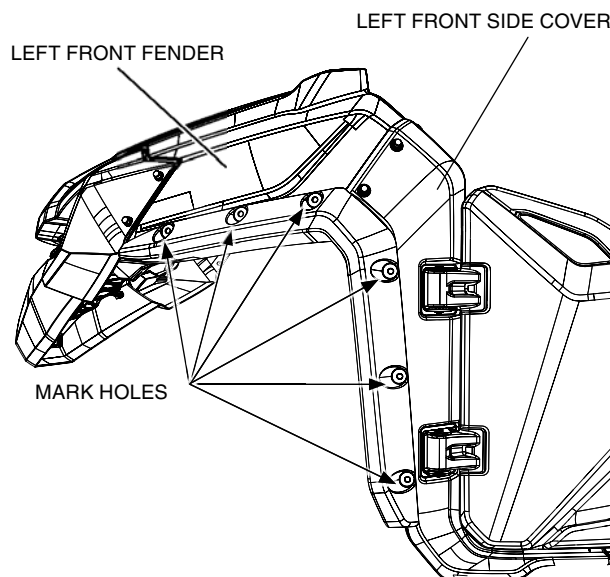


5. Set the fender flare aside and drill a hole at each marked point with a power drill and 8 mm drill bit.

6. Remove the two front grill trim clips from the position shown. Install the left fender bracket behind the front grill at the position shown with the removed trim clips.

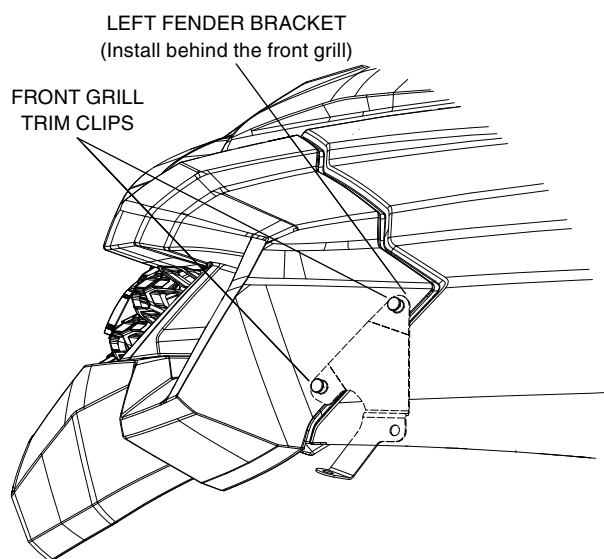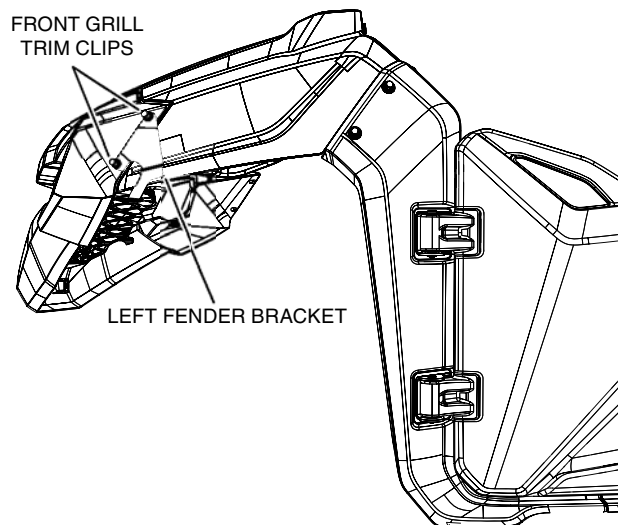

7. Install left fender flare using the seven supplied trim clips as shown.

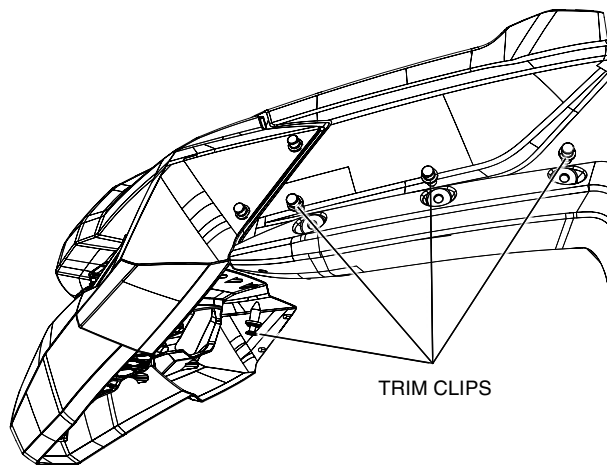

8. Repeat Steps 2 thru 6 for the right side (passenger side) fender flare.