



PARTS LIST

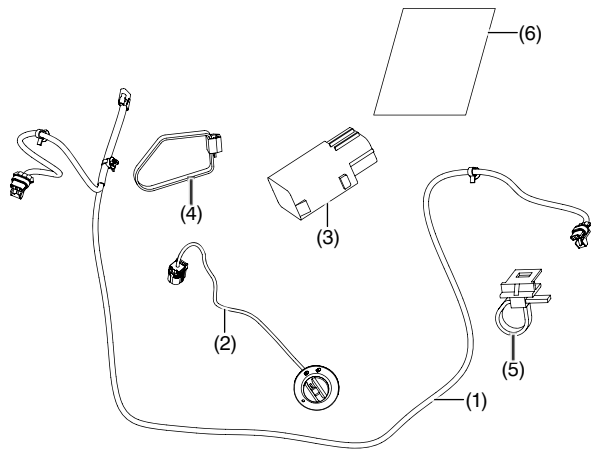

No.	Description	Qty
(1)	LED headlight sub-harness	1
(2)	LED headlight switch	1
(3)	LED headlight relay	1
(4)	Wire tie	1
(5)	Band holder	1
(6)	Installation Instructions URL	1

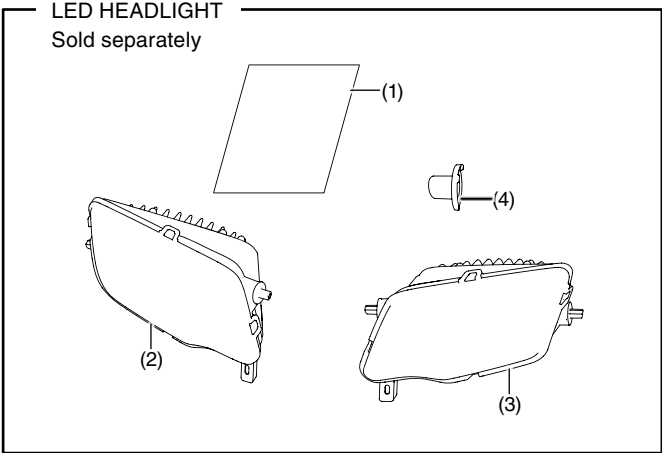

No.	Description	Qty
(1)	Installation Instructions URL	1
(2)	Right LED headlight	1
(3)	Left LED headlight	1
(4)	Headlight cap	4

TORQUE CHART

Refer to the Service Manual for the torque values of the removed parts.

INSTALLATION


⚠ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.

NOTE:


- The memory of the clock will be erased when you disconnect the battery. Reset the clock after reconnecting the battery.
- After the removed parts are reinstalled onto the vehicle, make sure that the wires and harnesses are not pinched.

1. Remove front hood.


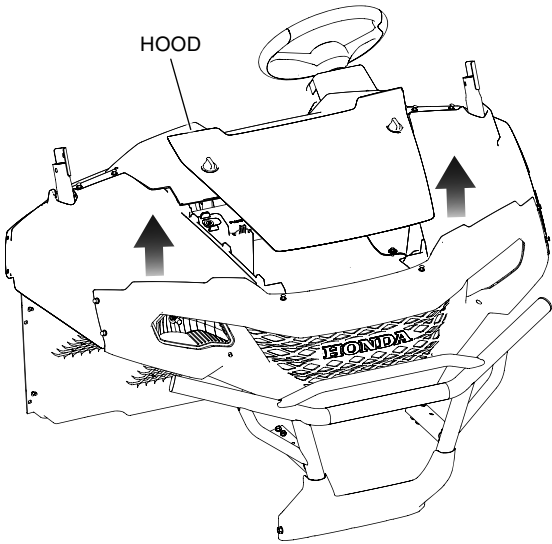


2. Disconnect the negative (-) cable from the battery.
3. Refer to the Service Manual for the vehicle and remove the following components in order.
- Front bumper
 - Headlight assemblies
 - Front grill
 - Left front fender

4. Install the headlight caps on the left LED headlight as shown.

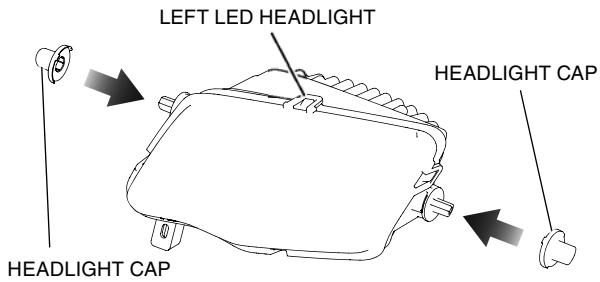

5. Install the left LED headlight as shown.

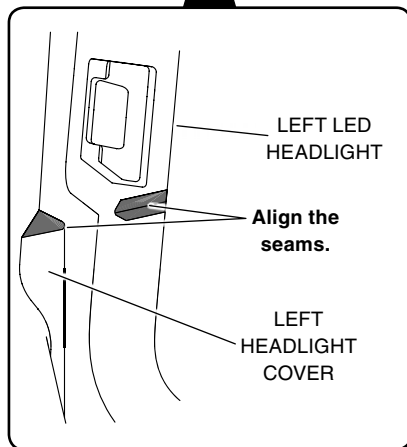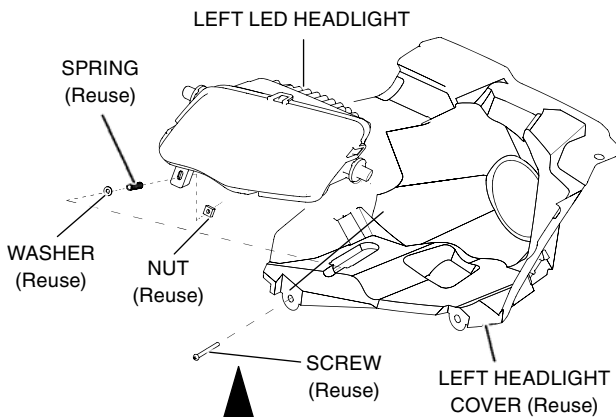


6. Repeat Steps 3 and 4 on the right side.

7. Disconnect and then remove the vehicle headlight sub-harness from the front grill.



Install the LED headlight sub-harness to the front grill as shown.

Connect the LED sub-harness to each LED headlight.



Connect the LED sub-harness to the vehicle main harness.

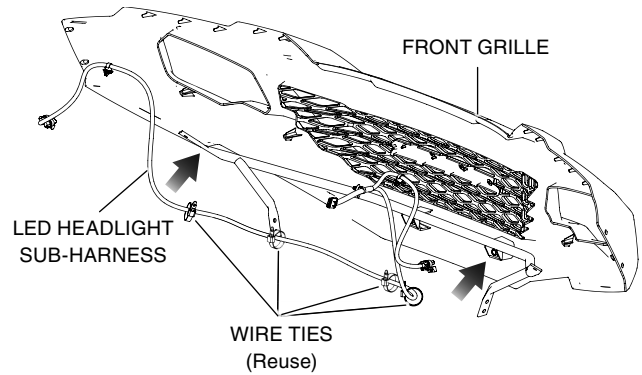



8. Install the LED headlight relay as shown.

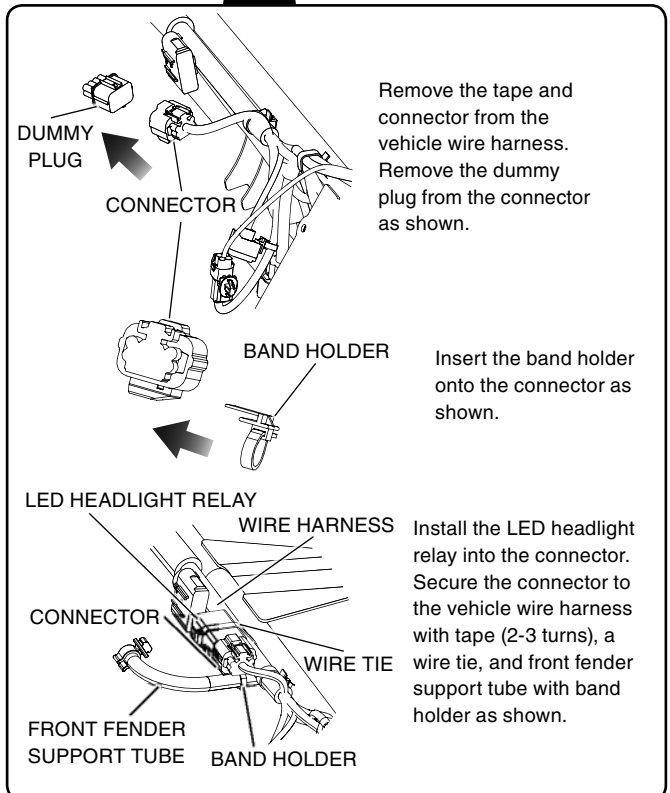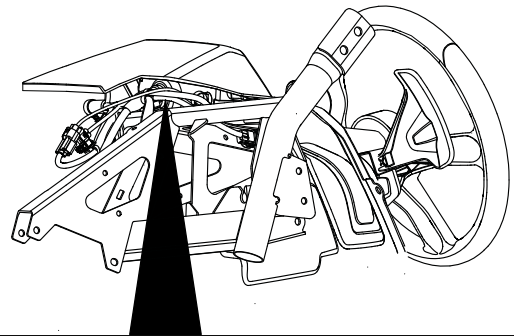

9. Remove the headlight switch as shown.

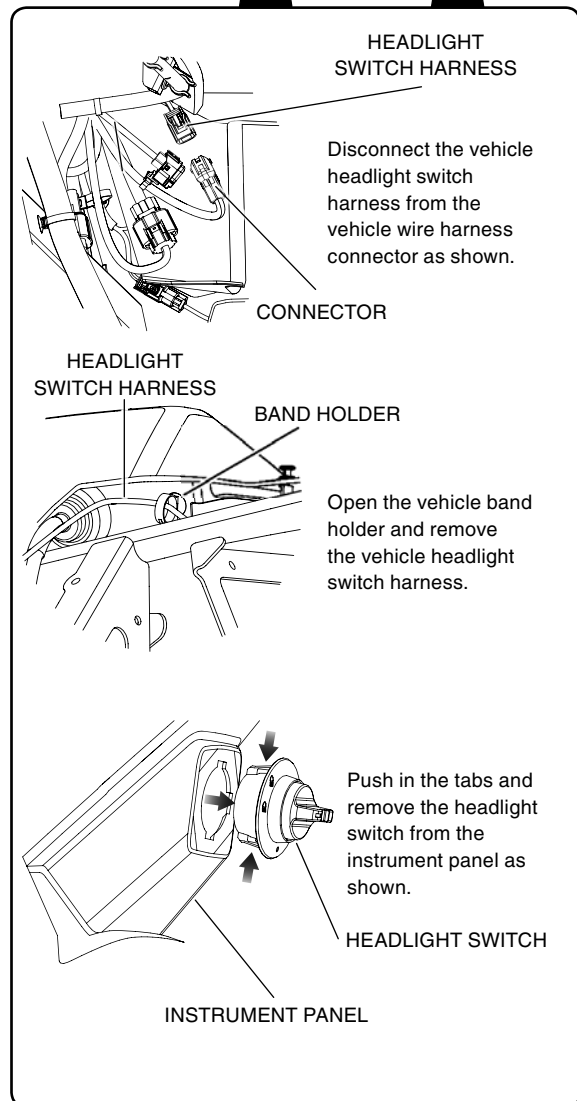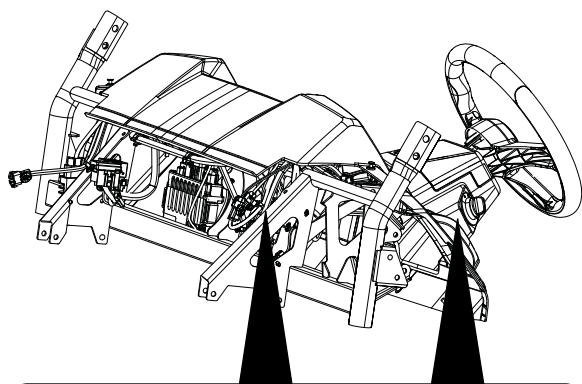

10. Install the LED headlight switch as shown.

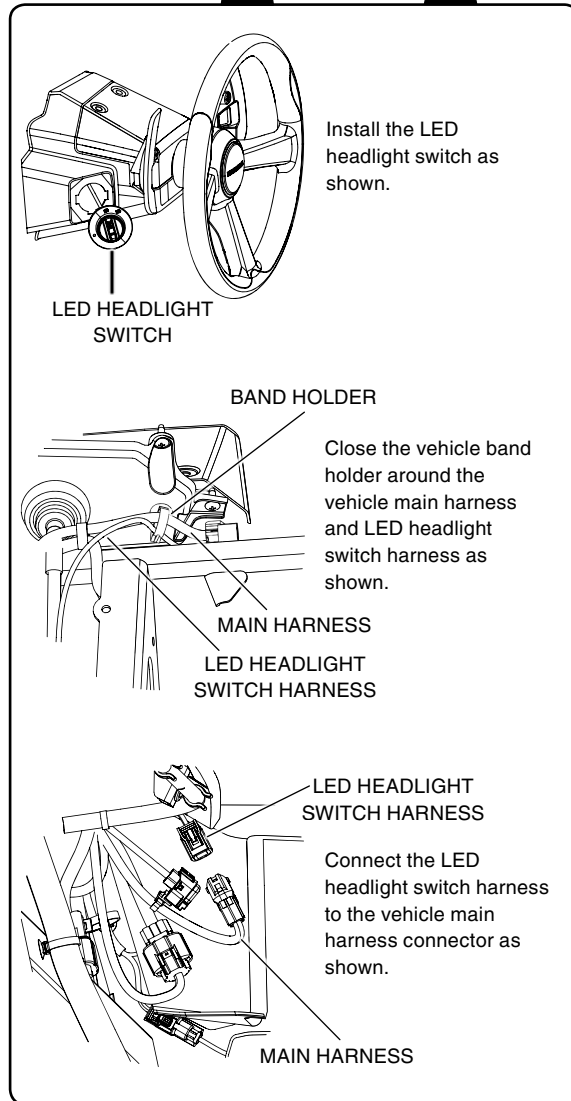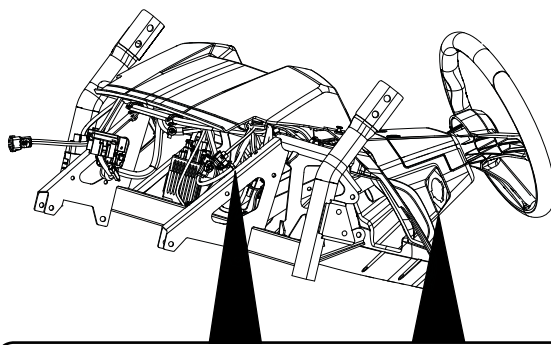

11. Install the vehicle's removed parts in the reverse order of removal.
 - Confirm that there are no wire harnesses pinched or too tight.
12. Connect the negative (-) cable to the battery and confirm the function of both LED headlights.
13. Check the LED headlight aim and adjust if needed.